

KALIVENTIL 400 Suction hose Heat resistant, up to 400 °C - CP HiTex 480



Technical specifications:

The suction hose has great heat resistance and flexible. It's suitable for air, steams, gases, smoke, and flue gas. It can be compressed longitudinally and flame retardant.

Other diameters can be ordered from DN 38 to DN 1016!

Heat resistance: -60°C / +400°C (for short time +450°C)

Structure: stainless steel strand reinforcement, special glass fibre coating

interior: gray

Exterior: gray, exterior steel spiral

Roll size: 3 and 6 m – it can be manufactured with different lengths



Standard: DIN 4102-B1

Will be manufactured with short delivery time. MOQ 3 m

Inside diameter (mm)	Weight kg/m	bending radius mm	Vacuum (bar)	Article Nr.
38	0,55	21	-0,45	480-0038-0000
40	0,58	22	-0,44	480-0040-0000
50	0,74	25	-0,38	480-0050-0000
60	0,87	28	-0,32	480-0060-0000
63-65	0,94	30	-0,29	480-0065-0000
70	1	31	-0,26	480-0070-0000
80	1,13	34	-0,2	480-0080-0000
100-102	1	51	-0,12	480-0100-0000
150-152	1	38	-0,05	480-0150-0000
160	1,07	38	-0,045	480-0160-0000
180	1,2	44	-0,04	480-0180-0000
203	1,32	48	-0,03	480-0200-0000
254	1,68	60	-0,02	480-0254-0000
300	1,97	69	-0,015	480-0300-0000
305	2	69	-0,015	480-0305-0000



TRIÁSZ-TÖMLŐ KFT.

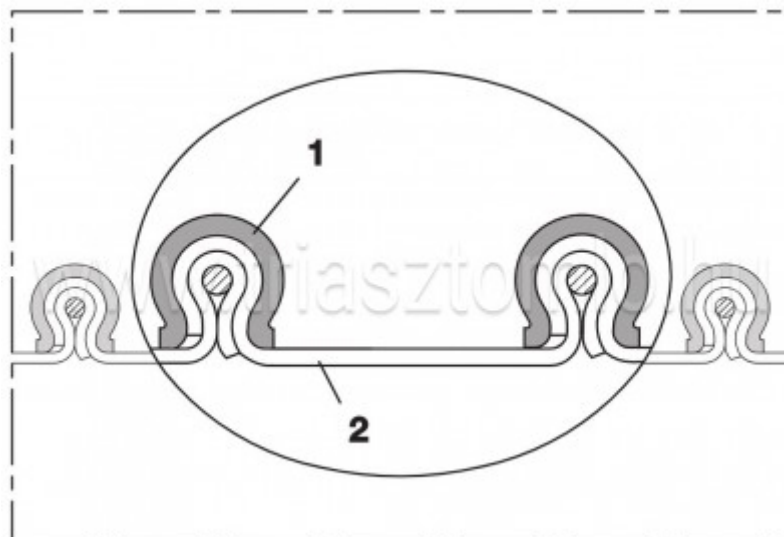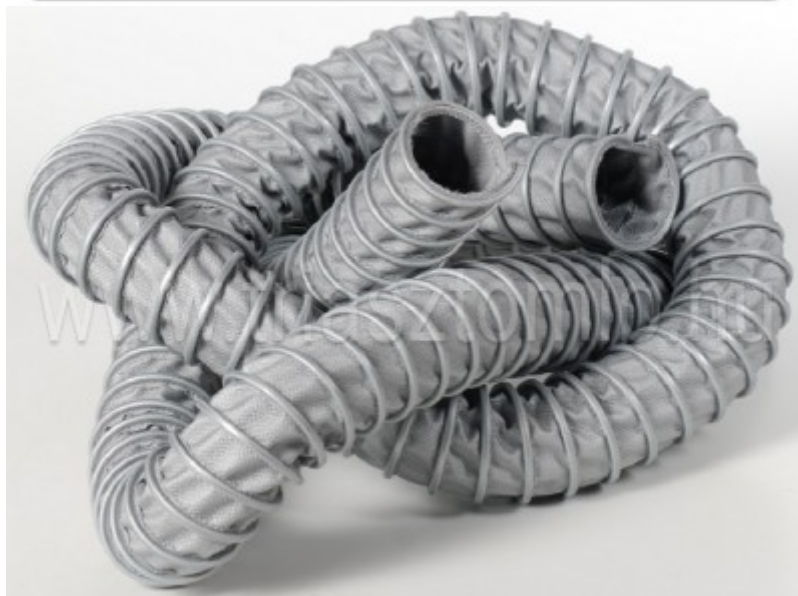



TRIÁSZ-TÖMLŐ KFT.



CLAMP 212

Bridge clamp for attaching externally corrugated spiral hoses



CLAMP 213

Bridge Clamp with quick-release closure for attaching externally corrugated spiral hoses



CLAMP 217

Bridge clamp with eyelet for attaching externally corrugated spiral hoses

