


## Rubber expansion joint PN16 EPDM PN16 with flange, 130 mm installation length



### Technical specifications:

It is suitable for compansion, vibration and shock absorption in the rigid tube system.

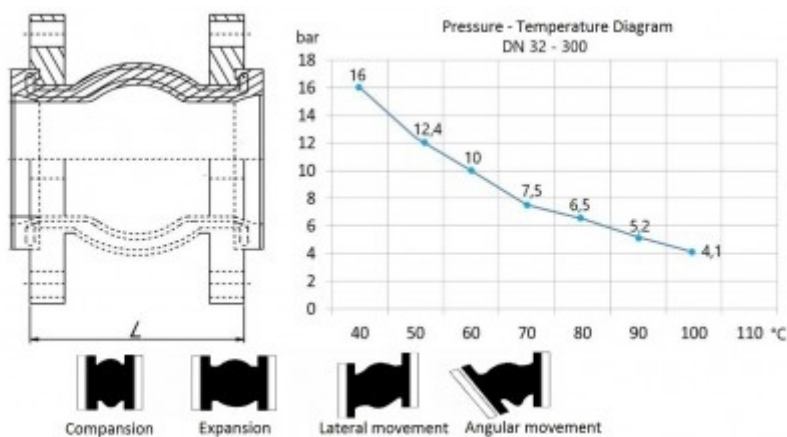

**Heat resistance:** -10°C / +100°C

**Installation length:** 130 mm

**Material:** EPDM

**Medium:** water

**Flanges:** from DN 32 to DN 150 PN 10/16, from DN 200 to DN 300 PN10 (according to EN1092)

**Flange material:** galvanized carbon steel

On stock at the manufacturer, short delivery time with regular shipments

| DN  | Compansion (mm) | Expansion (mm) | Lateral (mm) | Angular | Operating pressure (bar) | Article number |
|-----|-----------------|----------------|--------------|---------|--------------------------|----------------|
| 32  | 8               | 4              | 8            | 15°     | 16                       | 756013         |
| 40  | 8               | 4              | 8            | 15°     | 16                       | 756014         |
| 50  | 8               | 4              | 8            | 15°     | 16                       | 755143         |
| 65  | 12              | 6              | 10           | 15°     | 16                       | 755142         |
| 80  | 12              | 6              | 10           | 15°     | 16                       | 756016         |
| 100 | 12              | 10             | 12           | 15°     | 16                       | 756015         |
| 125 | 16              | 10             | 12           | 15°     | 16                       | 755051         |
| 150 | 16              | 10             | 12           | 15°     | 16                       | 756017         |
| 200 | 20              | 14             | 18           | 15°     | 10                       | 756018         |
| 250 | 20              | 14             | 18           | 15°     | 10                       | 756019         |
| 300 | 20              | 14             | 18           | 15°     | 10                       | 756020         |