


Three-way ball valve Made of acid resistant stainless steel



Technical specifications:

Every side has BSP female thread. It's available with L and T bore.

Body and ball: ASTM A351 CF8M **Sealing:** PTFE **Lever:** SS 201, with plastic coating

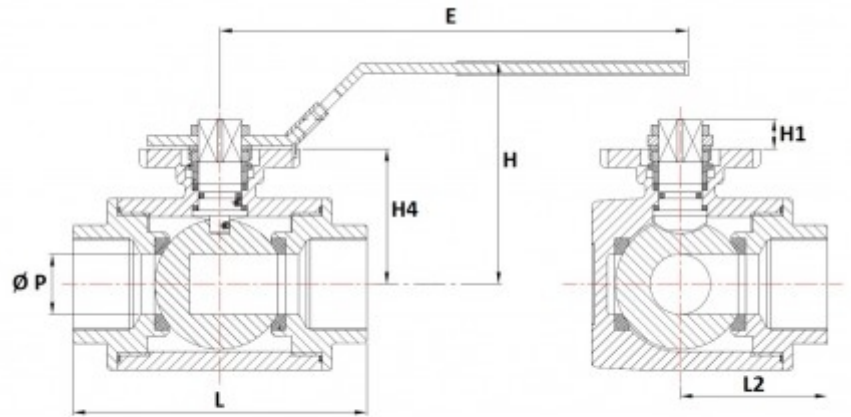

Heat range: -30°C/+140°C

Pressure resistance: max. 40 bar

Standard: 2014/68/EU : CE N° 0036, ATEX Group II Category 2 GD c T2
Zone 1 és 21 Zone 2

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

DN	ØP (flow)	L	L2	E	H	H1	H4	Weight (kg)	Article number
1/4"	9,5	75	37,5	130	66	8,5	36,8	0,7	801039
3/8"	11	75	37,5	130	66	8,5	36,8	0,67	801257
1/2"	12	75	37,5	130	66	8,5	36,8	0,63	800257
3/4"	15	85	42,5	161	72	11	41,2	0,94	801040
1"	20	100	50	161	77	12	46,5	1,39	801041
1 1/4"	25	122	61	203	92	13,5	56	2,91	801042
1 1/2"	32	131	65,5	203	96	13,5	60	3,66	800098
2"	40	158	79	203	107	13	70,5	6,31	800099

Pozició T1	Pozició T2	Pozició T3	Pozició T4	Pozició T5
				